


MECHANICAL RESCUE RAM RZM CFT

1094619

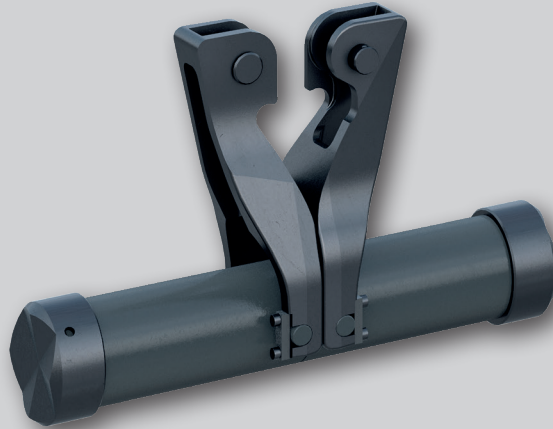

The new mechanical rescue ram RZM CFT for combi tools with fixed tips

- smooth-running pin on the pick-up fork for easy and quick attachment to the combi tool
- extends the functionality of a rescue cylinder for combination tools
- expands the range of applications due to large opening widths
- compact initial length (320 mm closed)
- as black edition especially for Rapid Intervention Teams

Compatible devices:


- SPS 270 H
- SPS 270 MK2 (E-FORCE3, SMART-FORCE)
- SPS 360 L
- SPS 360 MK2 (E-FORCE3, SMART-FORCE)

Possible uses and applications:

- creating rescue or access openings
- lifting of steering wheels
- opening car doors
- lifting or moving loads

MECHANICAL RESCUE RAM RZM CFT

1094619

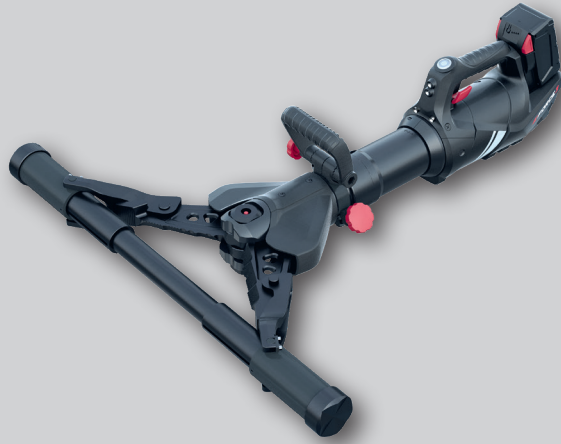

SPS 360 E-FORCE

Technical data RZM CFT:

| | Closed dimension | Weight | Part No. |
|---------|------------------|--------|----------|
| RZM CFT | 320 mm | 7.5 kg | 1094619 |

Technical data RZM CFT combined with combi tools

| Combi tool | Opening width | Max. compressive force | Total weight (ready for use) | Part no. |
|-----------------------|---------------|------------------------|------------------------------|----------|
| SPS 270 H | 685 mm | 22.5 kN | 17.3 kg | 1084065 |
| SPS 270 MK2 | 685 mm | 22.5 kN | 17.2 kg | 1093263 |
| SPS 270 MK 2 E-FORCE2 | 685 mm | 22.5 kN | 21.1 kg | 1087085 |
| SPS 270 MK 2 E-FORCE3 | 685 mm | 22.5 kN | 21.1 kg | 1093515 |
| SPS 270 MK 2 S-FORCE | 685 mm | 22.5 kN | 22.1 kg | 1101470 |
| SPS 360L | 795 mm | 30.7 kN | 22.4 kg | 1062580 |
| SPS 360L E-FORCE2 | 795 mm | 30.7 kN | 26.4 kg | 1074458 |
| SPS 360 MK2 | 805 mm | 30.7 kN | 21.7 kg | 1096646 |
| SPS 360 MK2 E-FORCE3 | 805 mm | 30.7 kN | 25.6 kg | 1096647 |
| SPS 360 MK2 S-FORCE | 805 mm | 30.7 kN | 26.4 kg | 1101471 |

WEBER-HYDRAULIK GMBH

Heilbronner Straße 30
74363 Güglingen, Germany
Phone +49 7135 71-10270
info@weber-rescue.com

Emil Weber Platz 1
4460 Losenstein, Austria
Phone +43 7255 6237-120
info@weber-rescue.com

Images are non-binding. We reserve the right to technical modifications.
2023A, 10/2023